

Tenda



All for better networking.

F3

300Mbps Wireless Router



F3

300Mbps Wireless Router

What it does

As a 300Mbps wireless router, F3 is specially designed for your smart home networking life. 3*5dBi high gain omni-directional antennas boost WiFi coverage up to 200m². Chip to router what is heart to human. It's superior Chip ensures stable and fast wireless performance, making it ideal for streaming music, uploading photos, video chatting, HD video streaming and other bandwidth-intensive tasks. Easy setup interface makes you can enjoy fluid WiFi experience effortlessly. No matter you are a tech-savvy enthusiast or a first-time user, F3 is super easy and intuitive to setup without time-consuming operations. F3 makes you enjoy easy and freewheeling E-life.


Main Features



WiFi Anywhere Throughout Your House

WiFi Coverage up to 200m²

Three external antennas boost WiFi throughout your house to enjoy ultimate surfing fun. F3 helps you keep mobile devices, media players and computers connected to WiFi with a reliable connection and expanded coverage in each corner of your house. No longer need to worry about the WiFi deadzones.

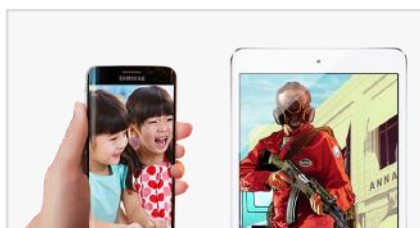

All Families Enjoy Surfing Fun

Bandwidth-Control

IP-based broadband control allows you to distribute bandwidth to specific PCs. You can allot bandwidth to different tasks for ensuring everyone's surfing need. When multiple devices are connected, streaming WiFi is available. It can ensure the best use of bandwidth by controlling congestion and preventing bandwidth abuse. This way, users of a small network receive committed and specific bandwidth, preventing non-critical applications from weakening network performance. Just enjoy the ultimate surfing fun anytime anywhere.



Set up in 30 Seconds

Simple To Use

Super simple setup interface helps you access to the Internet effortlessly in 30 seconds. No matter you are a tech-savvy enthusiast or a first-time user, F3 is super easy and intuitive to setup without time-consuming operations.

Specification

| Hardware Features | |
|-----------------------|--|
| Standard | IEEE802.11/b/g/n |
| Interface | 1*10/100M auto-negotiation WAN port 3*10/100M auto-negotiation LAN ports |
| Speed | 300Mbps over 2.4GHz band |
| Frequency | 2.4GHz |
| Power Supply | DC 9V 600mA |
| Power Consumption | 1.9W(no load)~3.3W(full-load) |
| LED Indicator | 1*LED |
| Button | 1*RESET |
| Wireless Features | |
| Antenna | 3x5dBi external undetachable antennas |
| Safety | WPA Algorithm: AES, TKIP, TKIP&AES Wireless Access Control: MAC Address Filtering |
| System Tools | Network Time, Sys Upgrade, Backup/Restore, Factory Default, Login Password, Sys Logs, Restart. |
| Software Features | |
| Sensitivity | 802.11b: -89 dBm @ 11 Mbit/s/802.11g: -74 dBm @ 54 Mbit/s/ 802.11n: -72 dBm @ MCS7 |
| DHCP Server | Support |
| Others | |
| Dimension | 127.4mm*90.5mm*26mm |
| Operating Temperature | 0°C ~ 40°C |
| Operating Humidity | 10% ~ 90% RH Non-condensing |
| Storage Temperature | -40°C~70°C |
| Storage Humidity | 5% ~ 90% RH Non-condensing |
| Certification | CE,RoHS |

SHENZHEN TENDA TECHNOLOGY CO.,LTD.

Tenda Technology Bldg.Int'l E-City,
#1001 Zhong Shan Yuan Rd.,Nanshan District,Shenzhen China.

E-mail:support@tenda.com.cn

Tel:+86-755-2765 7098

Fax:+86-755-2765 7178